




KITCHEN BRAINS®
(FAST.) MODULARM SCK

OPERATING GUIDE

ZAP Timer™

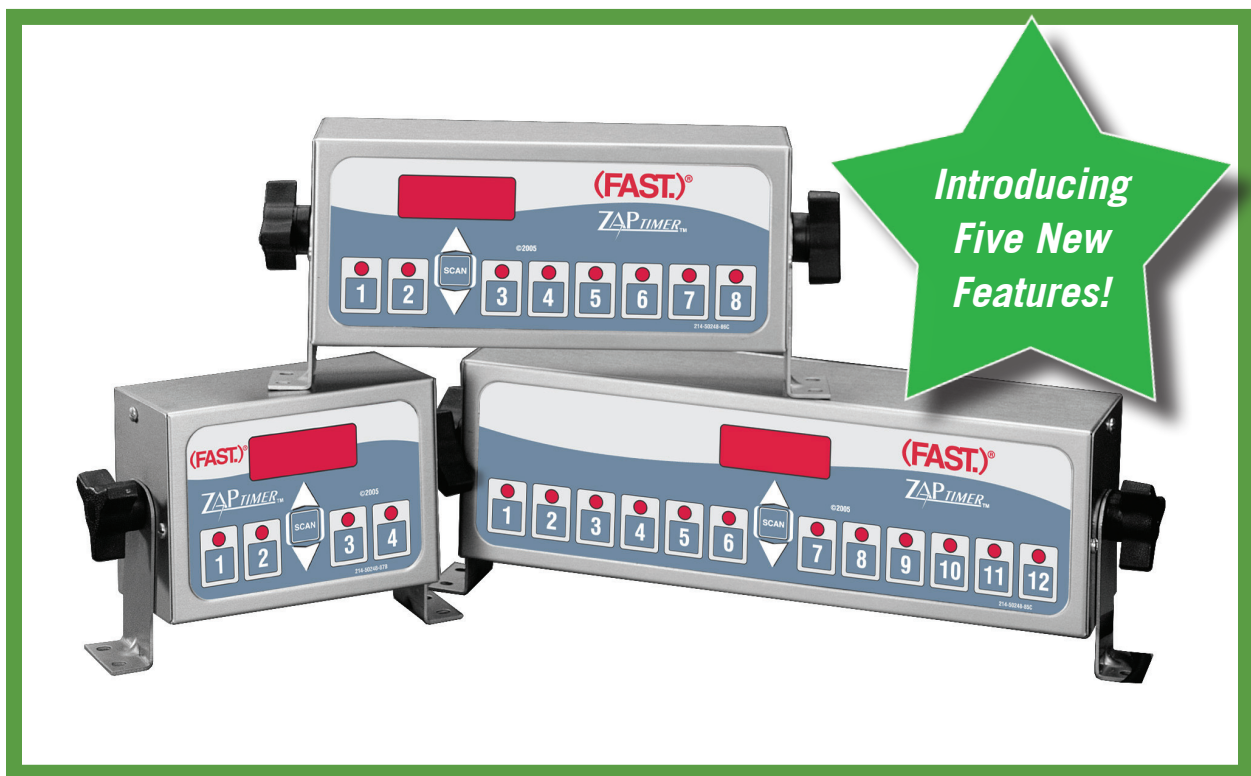

Operating Guide- ZAP Timer™

Save the instructions
for future reference.
www.KitchenBrains.com

24/7 Toll-Free Technical Support
1-800-243-9271
(from the U.S., Canada and the Caribbean)

OPERATING GUIDE

NOTE: The colon will flash if the unit is in hours/minutes mode and be on steady for minutes/seconds.

1. To **Cancel a Timing Cycle**, press and hold that product key.




2. To **View Remaining Time** on a product key, press the SCAN key. Continue pressing SCAN to scroll through all active times.



3. To **Enter Programming** from [--:--], press the ©2005 (hidden key) and hold for 3 seconds. Display will change to [PROG].



4. **Set Stage Timers** by selecting a product key. First press=Stage 1 timer (green LED will light); second press=Stage 2 timer (red LED will light). Use the UP & DOWN arrow keys to increase and/or decrease stage time. Holding arrow key down will increase time scroll speed. Default for all stages is 00:00.



5. To **Exit Programming mode**, press the ©2005 (hidden key) and ZAPTimer will return to idle mode [--:--].



- ★ 6. To **Set Pre-Alarms** press and hold the ©2005 (hidden key) to enter program mode. The display will change to "PROG". Press and hold the SCAN key for 3 seconds. The Display will change to "PrE". Using the UP and or DOWN arrow keys select "yes" for pre-alarms or "no" to disable pre-alarms. NOTE: this is a system change.



- ★ 7. To **Change the Pre-Alarm Time** press and hold the ©2005 (hidden key) for 3 seconds to enter program mode. The display will change to "PROG". Press desired key, the display will change to the existing set time. Press the key again, the display will show the "PrE" and cycle to show the existing pre-alarm set time. Using the UP or DOWN arrow keys to change to the desired time. To change another key press that product key and follow the same procedure.



- ★ 8. To **Change the Volume Level** press and hold the ©2005 (hidden key) for 3 seconds to enter program mode. The display will change to "PROG". Press and hold the SCAN key for 3 seconds. The Display will change to "PrE". Press the ©2005 (hidden key) one (1) time. The display will change to "Loud". Using the UP or DOWN arrow key select the desired level of volume. NOTE: this is a system change.



OPERATING GUIDE

NOTE: The colon will flash if the unit is in hours/minutes mode and be on steady for minutes/seconds.


- ★ 9. To **Change the Count Up/Countdown** ability, press and hold the ©2005 (hidden key) for 3 seconds to enter program mode. The display will change to "PROG". Press and hold the SCAN key for 3 seconds. The Display will change to "PrE". Press the ©2005 (hidden key) again. The display will change to "Cnt". Using the UP or DOWN arrow key select "UP" for count up option or "dn" for the countdown option. NOTE: this is a system change.



- ★ 10. To **Change the Pre-Alarm Beep Pattern** press and hold the ©2005 (hidden key) for 3 seconds to enter program mode. The display will change to "PROG". Press desired key, the display will change to the existing set time. Press the key again, the display will show the "PrE"; again press the product key. The Display will change to "bBEEP". Using the UP or DOWN arrow select the desired beep tone. . To change another key press that product key and follow the same procedure. NOTE: this is product specific and only for selected product.



OPERATING GUIDE



Food Automation - Service Techniques, Inc.
905 Honeyspot Road, Stratford, CT 06615-7147 USA

Phone: +1-203-377-4174

Sales: 1-800-FASTRON

Fax: +1-203-377-8187

International Callers: +1-203-378-6860

www.KitchenBrains.com

Toll-free technical support from the U.S.,
Canada, and Caribbean: 1-866-840-4271

Europe, Middle East, Africa

31 Saffron Court Southfields Business Park
Basildon, Essex SS15 6SS ENGLAND
Phone: +44 0 1268544000

China

1803, 18F, No 922 Hengshan Rd
Shanghai 200030, CHINA
Phone: +8613916 854 613

Asia Pacific

13A MacKenzie Road
Singapore
Phone: +65 98315927