

Scotsman

Self Contained Ice Machine 44 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installa-
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.



AC M 87 Medium Gourmet 20 g Ø 30 x H 34 mm



AC S 87 Small Gourmet 8 g Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

CAPACITY

19 kg

INTERNAL BIN

VOLTAGE V/Hz/ph

230/50/1

RTIFICATIONS









Minimum Maximum 10 43 Air temperature 38 Water temperature

OPERATING REQUIREMENTS

1 bar (14 psi) 5 bar (70 psi) Water pressure -10% +10% Electrical voltage

IMPORTANT NOTIC

els and specifications ge without notice. spec sheet is meant for co se only. echnical documentation please refer our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store


www.scotsman-ice.it www.scotsman-ice.com


AC 87 Ecox


Scotsman[®] Ice Systems

Self Contained Ice Machine 44 kg


Item #:
Project:
Quantity:





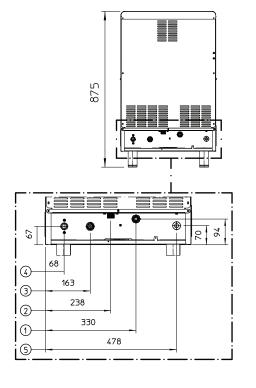

AIR FLOW



UNIT OF MEASUREMENT: mm

- 1. 25/32" OD OVERFLOW DRAIN
- 2. 3/4" GAS WATER INLET
- 3. 3/4" GAS WATER OUTLET WATER COOLED UNIT ONLY
- 4. 3/4" GAS WATER INLET WATER COOLED UNIT ONLY
- 5. CORD SET

Size (W x D x H) Net weight 531 x 600 x 875 mm

44 kg

SHIPPING DATA

Carton (W x D x H)

600 x 670 x 890 mm

Weight 51 kg

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	w	No. x Ømm²	A
		kg	kg	kg							
ACM 87 AS	230/50/1	44	44	35	30.7	10.8	3.4	570	1215	3 x 1.5	10
ACS 87 AS	230/50/1	40	39	31	35.8	11.1	5.0	580	1215	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions