



**TRUE REFRIGERATION  
INTERNATIONAL**

UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0  
Australia Tel +61 2 9618 9999 • [www.truemfg.com](http://www.truemfg.com)

MADE WITH  
**INNOVATION**  
IN THE USA

natural  
refrigerant

CE UK  
CA

5/21

Model:

**TUC-48-HC**

## Undercounter:



Solid Door Refrigerator with Hydrocarbon Refrigerant



**TUC-48-HC**

- ▶ True's undercounter units are designed with enduring quality that protects your long term investment.
- ▶ Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- ▶ Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- ▶ High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- ▶ All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- ▶ Interior - attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- ▶ Front breathing.
- ▶ Heavy duty PVC coated wire shelves.
- ▶ Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

## PLAN VIEW

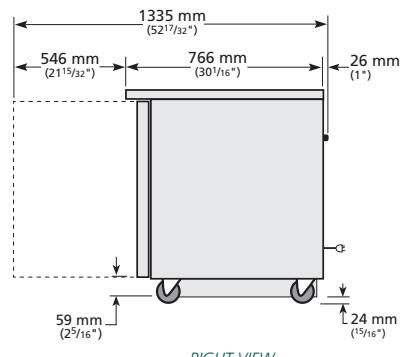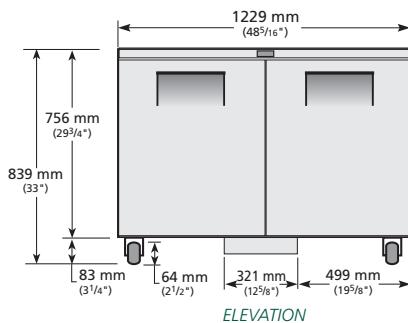

## ROUGH-IN DATA

Voltage: 220-240V/50-60Hz

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next  $\frac{1}{8}$ "').

Specifications subject to change without notice.

Model	Model Type	Doors	Shelves	Cabinet Dimensions (mm)			Net Volume (litres)	EEC	EEI	24 hr/ Energy Consumption (kWh)	Annual Energy Consumption (kWh)	Crated Weight (kg)
				W	D†	H						
TUC-48-HC	Counter Chilled	2	4	1229	766	839	278	A	24.1	1.649	602	118

† Depth does not include 1" for rear bumpers.

Test Standard: EN16825 - Climate Class 5 (40°C, 40% relative humidity).