

# OW01 WALL EXHAUST CANOPY

## BASIC FEATURES:

- ✦ the canopy is intended to remove impurities as smoke, vapour, odours, fumes and excessive heat produced by kitchen appliances
- ✦ stainless steel construction
- ✦ made of stainless steel, 1 mm thick, spot-welded, welded or riveted casing
- ✦ equipped with draining channel system and a drain tap with ball valve 1/2" for grease removal
- ✦ produced in two heights: 400 and 550 mm
- ✦ canopies up to 2900 mm are made as one-segment
- ✦ canopies longer than 2900 mm are assembled of two or more individual segments


## OPTIONAL\*:

- ✦ lighting (for canopy of depth  $\geq 700$  mm)
- ✦ integrated lighting (for canopy of depth  $\geq 800$  mm)
- ✦ mesh filters
- ✦ baffle-mesh filters
- ✦ cyclone filters
- ✦ blind filters
- ✦ exhaust fan (for canopy of 550 mm height)
- ✦ UV filtration (for canopy of 550 mm height)
- ✦ air ducts of untypical dimensions and position
- ✦ Ansul fire suppression system

\*Configuration of particular options depends on many factors and needs to be confirmed in terms of the possibility of their combining and usage.

## STANDARD:

- ✦ exhaust air ducts  $\varnothing 315$ mm
- ✦ regulating throttle
- ✦ baffle filters
- ✦ threaded hanging rods AW023, 4 x 2000 mm

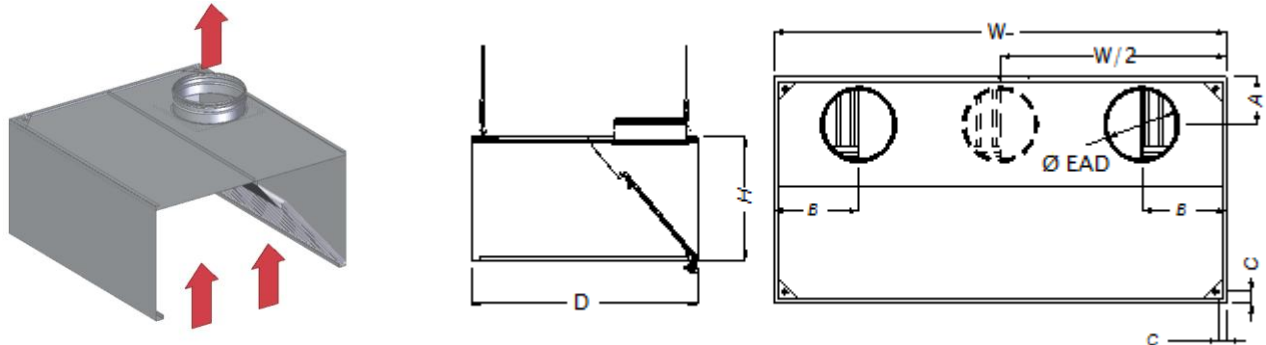

OW01

Width W [mm]	Depth D [mm]	Height H [mm]	A [mm]	B [mm]	Number of exhaust air ducts
1000 - 1500	700 - 1400	400, 550	210	W/2	1
1600 - 2000	700 - 1400	400, 550	210	375	2
2100 - 2900	700 - 1400	400, 550	210	500	2

$\varnothing$  EAD [mm] = 315; C [mm] = 50

Gort has rights to change the dimensions and construction in order to upgrade the functionality without informing the user.