

OZ99 CONDENSE CANOPY

BASIC FEATURES:




- ✦ designed to remove vapour from the canopies walls exhausted by dishwashers, boiling pans and other appliances with low grease emission level
- ✦ stainless steel construction
- ✦ made of stainless steel, 1 mm thick, spot-welded, welded or riveted casing
- ✦ equipped with draining channel system and a drain tap with ball valve 1/2" for grease removal
- ✦ produced in two heights: 400 and 550 mm
- ✦ canopies up to 2900 mm are made as one- segment
- ✦ canopies longer than 2900 mm are assembled of two or more individual segment

OPTIONAL:

- ✦ lighting (for canopy of depth ≥ 800 mm)
- ✦ air ducts of untypical dimensions and position

STANDARD:

- ✦ exhaust air ducts $\varnothing 315$ mm
- ✦ side baffles
- ✦ hanging rods

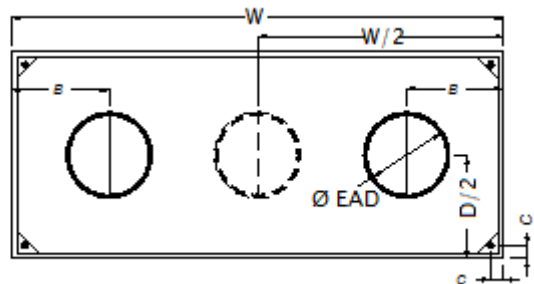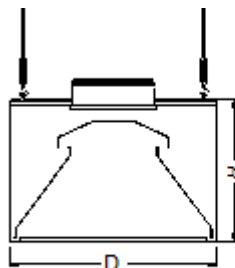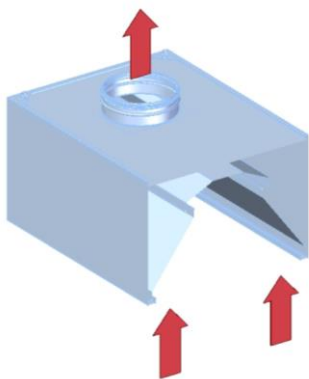

OZ99

Width W [mm]	Depth D [mm]	Height H [mm]	A [mm]	B [mm]	Number of exhaust air ducts
1000 - 1500	800 - 1400	400, 550	D/2	W/2	1
1600 - 2000	800 - 1400	400, 550	D/2	375	2
2100 - 2900	800 - 1400	400, 550	D/2	500	2

\varnothing EAD [mm] = 315; C [mm] = 50

Gort has rights to change the dimensions and construction in order to upgrade the functionality without informing the user.