TRUE REFRIGERATION ® INTERNATIONAL

UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Australia Tel +61 2 9618 9999 • www.truemfg.com



11/21



Model:

TUC-93D-6-HC

Deep Undercounter:


Drawered Refrigerator with Hydrocarbon Refrigerant



TUC-93D-6-HC

- True's undercounter units are designed with enduring quality that protects your long term investment.
- Factory engineered system using environmentally friendly R290 hydro carbon refrigerant maintains temperature of 0.5°C to 3.3°C for the best in food preservation.
- Exterior stainless steel front, top and ends. GalFan coated steel back.
- Interior NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- Each drawer accommodates one (1) 2/1GN (W 650mm x D 530 x H 200 mm) food pan (sold separately).
- Foamed-in-place using a high density, environmentally friendly polyurethane insulation.

PLAN VIEW

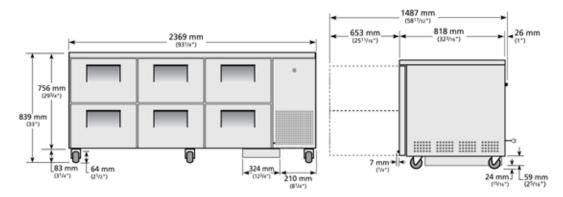

ROUGH-IN DATA

Voltage: 220-240V/50Hz

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next $\frac{1}{2}$ ").

	voltage. 220 2	· · · · · · · · · · · · · · · · · · ·								·			
			Doors/		Cabinet Dimensions (mm)		nsions	Net Volumes			24 hr/ Energy Consump-		Crated Weight
ľ	Лodel	Model Type	Drawers	Shelves	W	D†	Н	(litres)	EEC	EEI	tion (kWh)	tion (kWh)	(kg)
7	UC-93D-6-HC	Counter Chilled	0/6	_	2373	822	839	307	В	36,4	2,570	938	309

[†] Depth does not include 26 mm for rear bumpers.

Test Standard: EN16825 - Climate Class 5 (40°C, 40% relative humidity).